
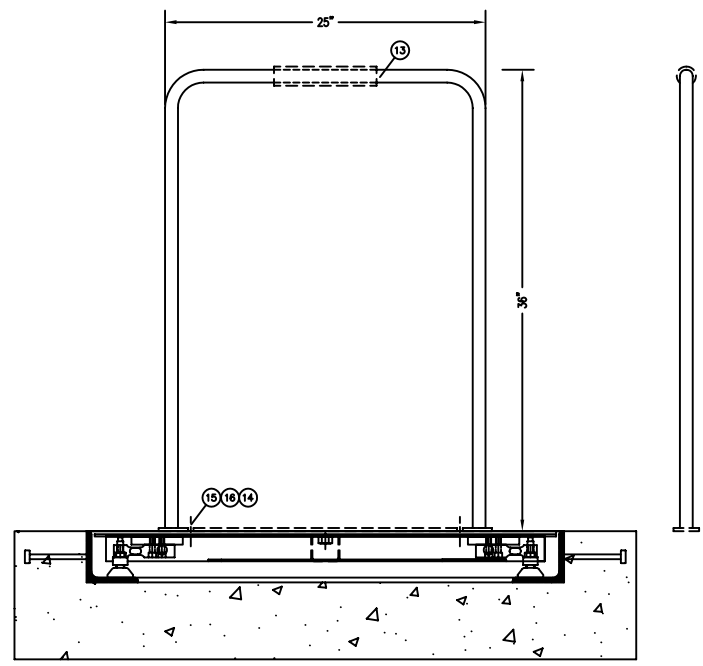

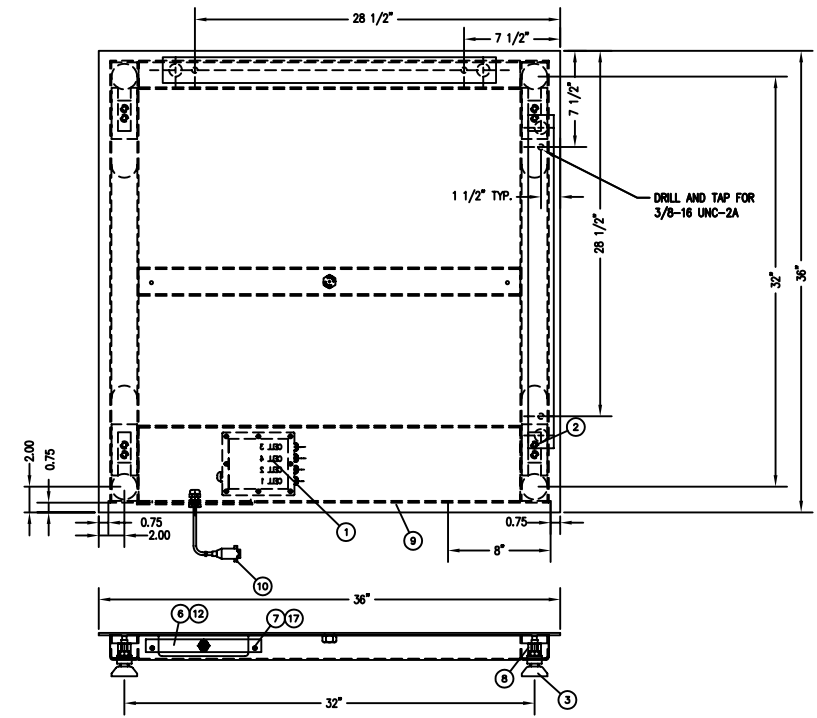
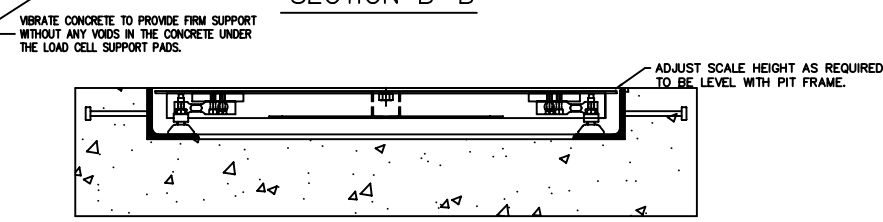
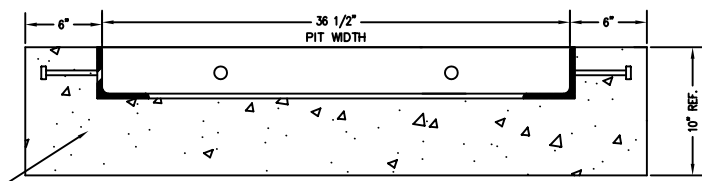
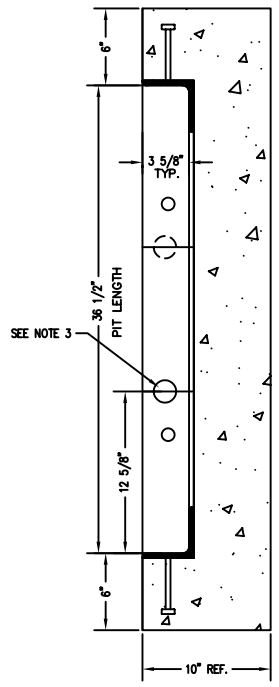


REVISION RECORD			
LTR	DESCRIPTION	DATE	BY
A	RELEASED FOR PRODUCTION	6/24/10	25080 GFL
B	ADDED ITEMS 19,20 AND DETAIL	7/10/12	25715 GFL

- NOTES:
- FOR BEST PERFORMANCE, SCALE SHOULD BE INSTALLED ON A SMOOTH AND LEVEL SURFACE.
 - REMOVE ITEMS 6 AND 7 FOR ACCESS TO JUNCTION BOX.
 - REFERENCE DWG. 1913-B050-0A FOR LOCATION OF SERIAL TAG AND LOGO.
 - REFERENCE DWG. 1934-A034-PS FOR LOAD CELL INSTALLATION AND TORQUE SPECIFICATION.
 - HAND RAIL CAN BE INSTALLED IN EITHER DIRECTION. TO BE DRILLED AND TAPPED AT TIME OF INSTALLATION.
 - CAUTION TO BE TAKEN NOT TO DAMAGE LOAD CELL, LOAD CELL CABLE, JUNCTION BOX, OR ANYTHING UNDER DECK, WHEN DRILLING.

- GENERAL NOTES:
- PIT FLOOR MUST BE SMOOTH, LEVEL, AND TRUE TO PLANE.
 - PROVIDE DRAIN FOR PIT IF NEEDED.
 - TRANSMISSION CABLE FROM LOAD CELL TO INDICATOR MUST BE IN 2 1/2" MIN. SIZE STEEL CONDUIT AT LEAST 24" FROM CLOSEST ELECTRICAL LINE. THEY MAY CROSS AT 90° ONLY.

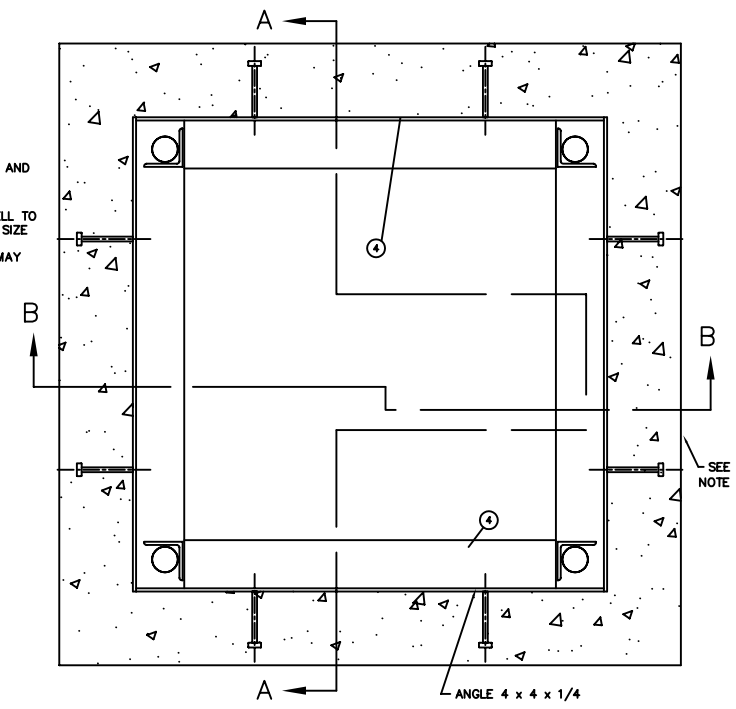

QTY.	QTY.	QTY.	ITEM	PART/DWG. NUMBER	DESCRIPTION	MATERIAL OR SOURCE	WT. EACH
16	16	20	6021-0014	SCW HX WASHER HD	1/4-20 x 5/8 TYPE F Z/P		
4	4	19	1913-C159-08	SHIPPING BRKT.			
1	1	18	418R1047	EYE BOLT	5/8-11		
2	2	17	6024-1027	WASHER FLAT	#10		
2		16	6024-0019	WASHER FLAT	3/8" S.S.		
2		15	6024-0046	WASHER LOCK	3/8" S.S.		
2		14	6007-0041	BOLT HEX HD	3/8-16 x 1" S.S.		
1		13	1934-B110-0A	HANDRAIL ASSY			
1	1	12	6610-1150	GLAND CONNECTOR			
4	4	11	6540-1062	HOLE PLUG	1 1/4" DIA.		0.05
1	1	10	3502-B396-0A	LOAD CELL CABLE			
1	1	9	1913-D133-0A	WEIGHBRIDGE	36" x 36"		120.0
4	4	8	LFB-500HMT	LOAD CELL			1.5
2	2	7	6021-0988	SCW HEX HEAD	#10-32 x 1/2"		0.05
1	1	6	1913-B032-08	J-BOX BRACKET			.18
1	1	5	1913-B050-0A	I.D. MARKING			0.1
1	1	4	1934-C097-0A	PIT STEEL ASSY.			88.5
4	4	3	1930-B363-0A	F.H. FOOT ASSY.	2" DIA.		0.9
8	8	2	6021-2064	S.H. CAP SCREW	3/8-24 UNF-2A x 1 1/4"		0.5
1	1	1	3502-C208-0A	JUNCTION BOX			2.0

QTY.	QTY.	QTY.	ITEM	PART/DWG. NUMBER	DESCRIPTION	MATERIAL OR SOURCE	WT. EACH
225	225	WT.			PARTS/MATERIAL LIST		
-1A	-0A	ASSY					

UNLESS OTHERWISE SPECIFIED TOLERANCE ON DIMENSIONS ARE:
 ANGLES ± 1/2°
 INTEGERS/FRACTIONS ± 1/16 IN.
 DECIMALS (.X) ± .03 IN.
 DECIMALS (.XX) ± .01 IN.
 DECIMALS (.XXX) ± .005 IN.
 NOTE: WHOLE NUMBERS MUST BE WRITTEN XX.XXX TO INVOKE DECIMAL TOLERANCES.

THIS DRAWING IS THE PROPERTY OF THE CARDINAL SCALE MFG. CO. AND SHALL NOT BE USED NOR REPRODUCED EITHER WHOLLY OR IN PART EXCEPT WITH WRITTEN AUTHORIZATION. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

Cardinal
 Cardinal Scale Manufacturing Co.
 1000 N. W. 10th St., Ft. Lauderdale, FL 33304
 CARDINAL DETECTO FULLER WEIGHING SYSTEMS

TITLE: FINAL ASSY. FH-133-II/C, FH-133-II/CH
 SCALE: NTS DO NOT SCALE DRAWING NEXT ASSEMBLY
 DR. GFL DATE 7/12/10
 CH. DATE
 MODEL: FH-133-II/C SHEET 1 OF 1 DWG. NO. 1913-D139-0A REV. B